

LTLNC300-R | DATASHEET

LED line light 300 mm, red, 625 nm





SPECIFICATIONS

Lighting specifications

(mm)	300
(mm)	15
(mm)	20-100
	36
	red, 625 nm
(nm)	20
(klux)	n.a.
	(mm) (mm) (nm)

Electrical specifications

Supply voltage ²	(V)	24
Current ²	(mA)	2000
Power consumption	(W)	48
Typical pulse voltage	(V)	31
Max pulse current	(mA)	4000
Peak power consumption	(W)	124
Max pulse duration	(ms)	100
Max duty cycle	(%)	5
Estimated MTBF ⁴	(hours)	> 20000
Connector		M8
Included cable		CBLT003 included

¹ Measured at minimum working distance

 $^{2}\pm2\%$

³ With constant driving voltage

⁴ Drop tp 50% intensity @ 25°C

KEY ADVANTAGES

Ultra high power

Color matched white model

Condenser lens for a perfectly focused beam of light

Rugged industrial design with built in industrial connector for easy integration into any machine vision system.

Forced air cooling option

LTLNC series are ultra-high power LED line illuminators designed for line scan applications. Their special design provides both a powerful and homogeneous beam of light that is sharply focused onto the object that must be inspected, by means of a condenser lens.

Mechanical specifications

Length	(mm)	350.0
Width	(mm)	32.0
Height	(mm)	60.0
Mass	(g)	350
Clamping system		4x M3 threaded holes
Cooling method	i	air compressed cooling or passive

Environment

Operating temperature	(°C)	0-40
Storage temperature	(°C)	0-50
Operating relative humidity	(%)	20-85, non condensing
Installation		Indoor use only

Eye safety

Risk group (CEI EN 62471:2010)

Risk group 2

COMPATIBLE PRODUCTS

Full list of compatible products available here.




A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


LTLNC300-R | DATASHEET



CONNECTOR PINOUT



Function	Cable color
LED +	Brown
LED +	White
LED -	Blue
LED -	Black

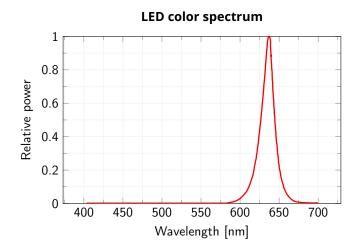

LIGHT BEAM COARSE ADJUSTMENT

Simply untighten the lateral screws to adjust the axial position of the condenser lens.

When the position is set, do not overthighten the screws to avoid damage to the condenser lens.



ADDITIONAL INFO

Lighting structure

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.