



# LTLNE-300-F-D-FC-W | DATASHEET

LED line light, direct, 300 mm length, far focusing, fan cooling, white, 6200 K



### KEY ADVANTAGES

**High density LEDs.**

**3 types of projection lenses**

Near field focusing (N), far field focusing (F), collimated (C).

**3 opto-mechanical configurations**

Lens only, coaxial illumination (CX) or with 45° mirror (MR).

**2 cooling methods and power intensities**

Passive or active with fans.

**Optional diffusive sheet (D) for illumination uniformity**

Hot spots reduction when inspecting highly reflective surfaces.

**LTLNE series** are high power LED line illuminators designed for line scan applications. LTLNE series are available in three opto-mechanical versions: basic configuration with condensing lens, as coaxial line lights (CX) or integrating a 45° mirror (MR).



### SPECIFICATIONS

#### Lighting specifications

|                              |        |               |
|------------------------------|--------|---------------|
| Illumination area length     | (mm)   | 300           |
| Illumination area height     | (mm)   | 20            |
| Type                         |        | direct        |
| Focusing                     |        | far           |
| Optimal working distance     | (mm)   | 100-200       |
| Number of LEDs               |        | 42            |
| Light color, peak wavelength |        | white, 6200 K |
| Spectral FWHM                | (nm)   | -             |
| Illuminance <sup>1</sup>     | (klux) | n.a.          |
| Diffuser                     |        | yes           |

#### Electrical specifications

|                             |         |                  |
|-----------------------------|---------|------------------|
| Supply voltage <sup>2</sup> | (V)     | 24               |
| Current <sup>3</sup>        | (mA)    | 4000             |
| Power consumption           | (W)     | 100              |
| Estimated MTBF <sup>4</sup> | (hours) | > 20000          |
| Connector                   |         | WEIPU SP1710/P9  |
| Included cable              |         | CBLT007 included |

<sup>1</sup> Measured at minimum working distance

<sup>2</sup> ±2%

<sup>3</sup> With constant driving voltage

<sup>4</sup> Drop tp 50% intensity @ 25°C

#### Mechanical specifications

|                 |      |                      |
|-----------------|------|----------------------|
| Length          | (mm) | 340.0                |
| Width           | (mm) | 130.0                |
| Height          | (mm) | 40.0                 |
| Mass            | (g)  | 2500                 |
| Clamping system |      | 8x M4 threaded holes |
| Cooling method  |      | fan                  |

#### Environment

|                             |      |                       |
|-----------------------------|------|-----------------------|
| Operating temperature       | (°C) | 0-40                  |
| Storage temperature         | (°C) | -20-+60               |
| Operating relative humidity | (%)  | 20-85, non condensing |
| Installation                |      | Indoor use only       |

#### Eye safety

|                                |  |              |
|--------------------------------|--|--------------|
| Risk group (CEI EN 62471:2010) |  | Risk group 2 |
|--------------------------------|--|--------------|

### COMPATIBLE PRODUCTS


Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.


All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.

**CONNECTOR PINOUT**

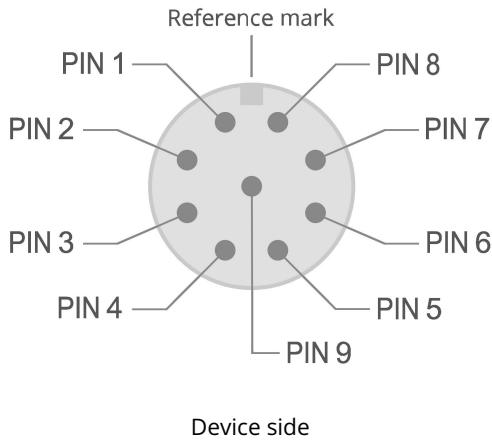

| Pin | Function | Description                             | Cable color |
|-----|----------|---|-------------|
| 1   | LED+     | Light supply: positive terminal         | White       |
| 2   | LED+     | Light supply: positive terminal         | Brown       |
| 3   | LED-     | Light supply: negative terminal         | Green       |
| 4   | LED-     | Light supply: negative terminal         | Yellow      |
| 5   | NTC+     | Thermal sensor input: positive terminal | Grey        |
| 6   | NTC-     | Thermal sensor input: negative terminal | Pink        |
| 7   | FAN-     | Fan supply: negative terminal           | Blue        |
| 8   | FAN+     | Fan supply: positive terminal           | Red         |
| 9   |          | Not used                                |             |

**LED color spectrum**

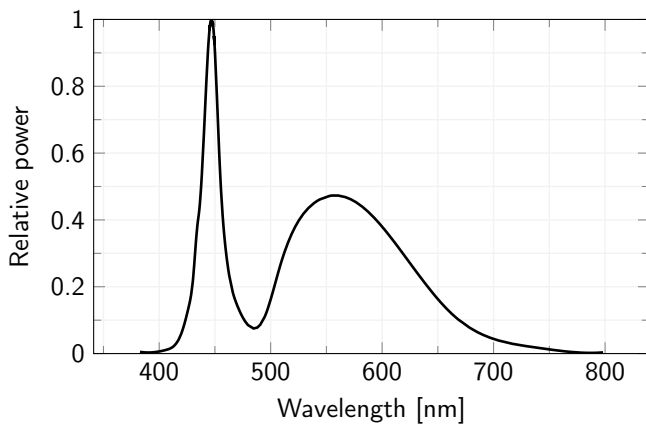

**ADDITIONAL INFO**

**Lighting structure**

**Type**

**Projection lenses and focusing distances**

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.